RESIDENTIAL

WST-BKX54-E3

WBC Back Contact Series

490-505W



PERFORMANCE WARRANTY

COMPLIMENTARY INSURANCE

30 years product warranty
30 years linear performance
-1 % 1st-year degradation
-0.35 % annual power degradation
>88.85 % of linear performance after 30 years
Applicable to front-side power at STC only

WINAICO
Solar for Experts.

www.winaico.com.au

MECHANICAL DATA

Cell	Monocrystalline, N-type, bifacial
Quantity and wiring of cells	108 (6 strings x 18 cells)
Dimensions	1,800 x 1,134 x 35 mm
Weight	25 kg (55.1 lbs)
Front-side glass	2.0 mm, highly transparent solar glass with anti-reflective coating
Back-side glass	2.0 mm, heat strengthened glass
Frame	Black anodised aluminium
Junction box	IP68, 3 bypass diodes
Connector type	Stäubli Electrical Connectors AG (MC4-Evo2A) PV-KST4-EVO2A/xy, PV-KBT4-EVO2A/xy
Cable length (IEC/UL)	Cable x 2 1,200 mm / 4 mm²
Fire safety class[1] (IEC61730)	Class C
Protection class (IEC 61140)	II


OPERATING CONDITION

Operating temperature	–40 °C to +85 °C / –40 °F to +185 °F
Module [T98] $_{MAX}$	70°C
Maximum system voltage IEC	1,500 VDC
Maximum series fuse	30 A*
Maximum design load (push/pull)	+3,600 Pa / -1,600 Pa
Maximum test load (push/pull)	+5,400 Pa / -2,400 Pa
Nominal module operating temperature NOCT	45 ± 2°C
Temperature coefficient of P_{MAX}	-0.26%/°C
Temperature coefficient of V_{OC}	-0.22%/°C
Temperature coefficient of I_{SC}	0.05%/°C

*The installation of additional blocking diodes or fuses is necessary with the parallel connection of module strings.

DIMENSIONS

Unit: mm

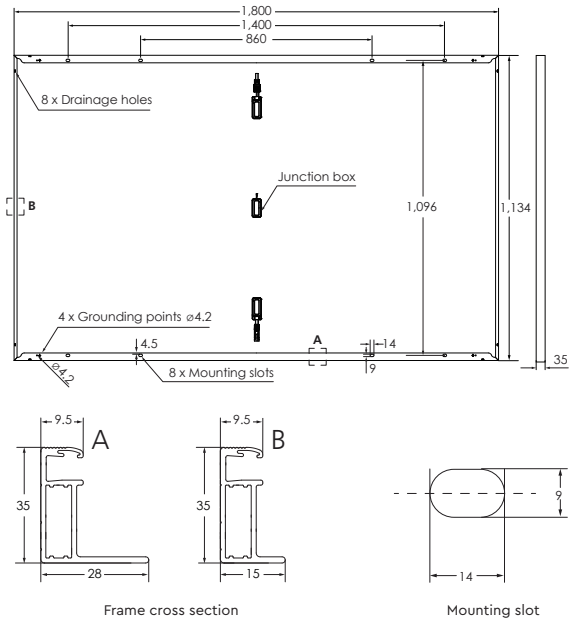

Frame cross section

Mounting slot

PACKAGING




1,810 mm	1,120 mm	1,252 mm	31 modules	830 kg	26 pallets

ELECTRICAL DATA

Module type


		WST-490BKX54-E3		WST-495BKX54-E3		WST-500BKX54-E3		WST-505BKX54-E3		
Test Conditions		STC[2]	NOCT[3]	STC[2]	NOCT[3]	STC[2]	NOCT[3]	STC[2]	NOCT[3]	
Nominal performance	P_{MAX}	490	373	495	377	500	382	505	386	Wp
Voltage at maximum performance	V_{MP}	33.75	31.89	33.86	32.00	33.97	32.19	34.08	32.29	V
Current at maximum performance	I_{MP}	14.52	11.70	14.62	11.78	14.72	11.88	14.82	11.96	A
Open circuit voltage	V_{OC}	40.56	38.82	40.66	38.91	40.77	39.25	40.88	39.35	V
Short circuit current	I_{SC}	15.28	12.32	15.38	12.40	15.48	12.49	15.58	12.57	A
Module efficiency		24.0		24.3		24.5		24.7		%
Power tolerance		0~+5		0~+5		0~+5		0~+5		W

WINAICO PERFORMANCE GUARANTEE

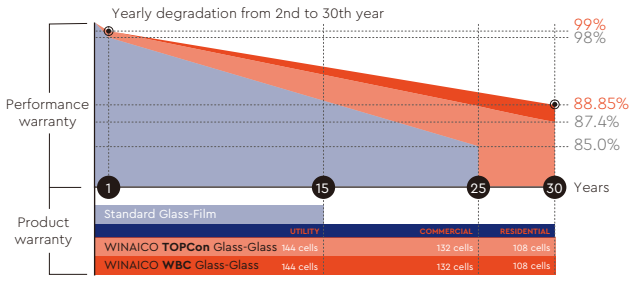

Based on front-side power at STC

CHARACTERISTIC CURVES

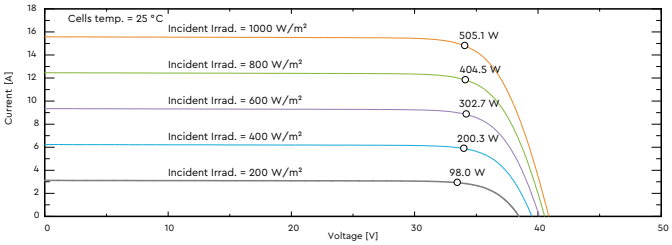

1. The fire safety test methods according to IEC 61730-2, Fire Tests of Roof Coverings.
2. Electrical data applies under standard test conditions (STC): solar radiation 1,000 W/m2 with light spectrum AM 1.5, with cell temperature 25 °C. Measurement tolerance of Pmax:±3%; Voc:±3%; Isc:±5% at STC.
3. Electrical data applies under Nominal Operation Cell Temperature (NOCT), irradiance of 800 W/m², spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s.

PRODUCT AND QUALITY CERTIFICATES

IEC 61215:2021, IEC 61730:2023

ISO 9001 Quality Management System
ISO 45001 Occupational Health and Safety Management System
ISO 14001 Environment Management System
SA 8000 Social Accountability

Specifications included in this datasheet are subject to change without notice. WST-505BKX54-E3_AUS_CEC.1026

WINAICO Australia Pty Ltd

Tel + 61 2 8091 2771
australia@winaico.com
www.winaico.com.au
Suite 7, Level 4, 35 Buckingham Street, Surry Hills, NSW, 2010, Australia

Win Win Precision Technology Co., Ltd

Tel + 886 3 568 8699 · info@w-win.com.tw
www.wwpt.com.tw · www.winaico.com
4F., No. 180, Sec. 2, Gongdao 5th Rd., East Dist., Hsinchu City 300, Taiwan R.O.C.
Made in China

WINAICO Solar for Experts.

WINAICO is a trademark of Win Win Precision Technology Co., Ltd.